


1650nm Fiber Optic collimator

Product Features

- Low Insertion Loss
- Collimating distance 100m

Product Applications

- Professional applications for methane gas telemetry

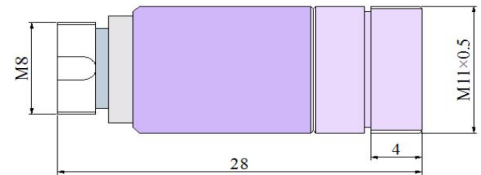

Specifications

Parameter	Unit	Value
Center Wavelength	nm	1650
Working distance	M	< 100 (direct)
beam diameter	mm	3.8
Beam divergence Angle	°	0.04
Input Connector	-	FC/APC
Max. Optical Power (CW)	mW	500
Fiber Type	-	G652D
package dimensions	mm	Φ11×L28
Operating Temperature	°C	-10 to +80
Packaging material	-	Stainless steel